ID383

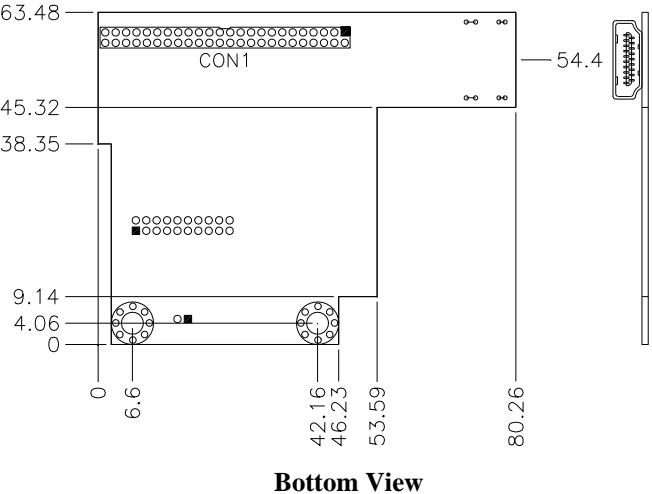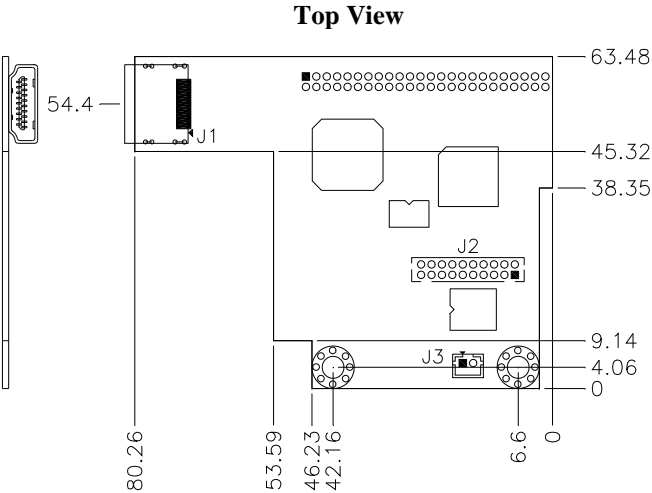## HDMI Daughter Board
For Mini ITX Motherboards

USER'S GUIDE

Version 1.0

ID383: Chrontel CH7315B x1 for HDMI
ID383D: Chrontel CH7315B x1 for HDMI + Chrontel CH7307C x1 for DVI

Top View

Bottom View

J2: DVI Connector

Signal Name	Pin #	Pin #	Signal Name
TDC1-	2	1	TDC1+
Ground	4	3	Ground
TLC-	6	5	TLC+
+5V	8	7	Ground
NC	10	9	HPDET
TDC2-	12	11	TDC2+
Ground	14	13	Ground
TDC0-	16	15	TDC0+
NC	18	17	NC
DDC_SC	20	19	DDC_SD

J3: SPDIS Connector

Pin #	Signal Name
1	NC
2	SPDIF Signal

BIOS Setting and Drivers Installation:

When using ID383 with the MB899EH or MI910EH motherboard, the BIOS parameters has the following options:

1.1. **SDVO Device Setting:** DVI or Dual DVI
*When using ID397D DVI, select DVI; when using HDMI, select Dual DVI

1.2. **Boot Display**: DVI or CRT+DVI

2. The type of graphics drivers to be installed depends on the graphics hardware used.

3. After the installation of the graphics driver, the following display settings will be available: